

型号
Type B203-B214



特性及应用:

S200 (B200) 型是一种无轴承支撑的单向轴承。


楔块直接在用户提供的轴上运行，需要轴承来支撑轴向和径向载荷。

Description:



Type S200(B200) is a non-bearing supported sprag type freewheel.

The sprags run directly on the shaft provided by the user. Bearings are required to support axial and radial loads.

安装参考范例

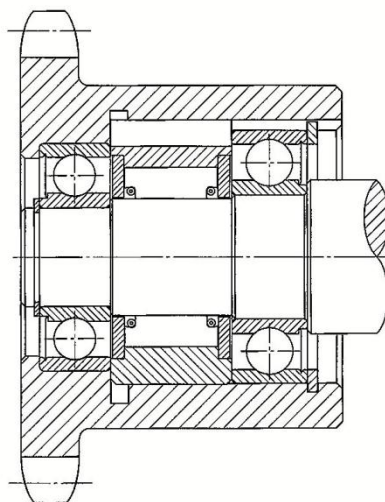

Mounting example

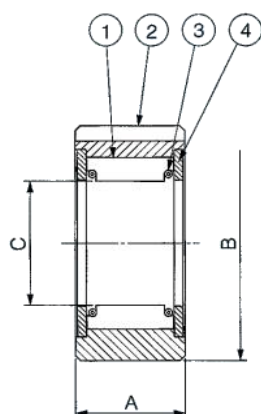

- (1) 凸轮
(2) 外圈
(3) 弹簧
(4) 侧板

型号 Type	扭矩容量 Torque Capacity (N.m)	空转摩擦扭矩 Drag Torque (N.m)	最大空转速度 Max.. Overrunning (r/min)		最大分度 Max. Indexing (cycle/ min)
			轴 Shaft	外圈 Outer Race	
B 203	39.2	0.10	2400	500	150
B 204	58.8	0.10	2400	500	150
B 205	98	0.20	1800	400	150
B 206	235	0.20	1800	350	150
B 207	372	0.20	1800	300	150
B 208	549	0.20	1800	200	150
B 209	549	0.20	1800	200	150
B 210	784	0.29	1200	200	150
B 211	784	0.29	1200	200	150
B 212	1230	0.29	1200	180	150
B 213	1230	0.29	1200	180	150
B 214	1390	0.39	1000	180	150

型号 Type	A (+0 to -0.6)	B	键槽 Keyway	选配轴承 With JIS Bearing No.	轴径 Shaft Dia. C (+0 to -0.025)	重量 Weight (kg)
B 203	25.0	40 (-0.014-0.039)	4X2.5	6203	16.510	0.23
B 204	25.0	47 (-0.014-0.039)	5X3	6204	18.796	0.34
B 205	25.0	52 (0.017-0.042)	5X3	6205	23.622	0.45
B 206	28.0	62 (-0.017-0.042)	7X4	6206	32.766	0.68
B 207	28.0	72 (-0.017-0.042)	7X4	6207	42.088	0.80
B 208	32.0	80 (-0.017-0.042)	10X4.5	6208	46.761	0.91
B 209	32.0	85 (-0.020-0.045)	10X4.5	6209	46.761	0.95
B 210	32.0	90 (-0.020-0.045)	10X4.5	6210	56.109	1.00
B 211	32.0	100 (-0.020-0.050)	10X4.5	6211	56.109	1.40
B 212	42.0	110 (-0.020-0.050)	10X4.5	6212	70.029	1.80
B 213	42.0	120 (-0.020-0.050)	10X4.5	6213	70.029	2.30
B 214	42.0	125 (-0.024-0.060)	12X4.5	6214	79.356	2.40