

型号 Type BSEU



特性及应用:

BSEU 系列凸轮离合器是欧式逆止凸轮离合器，使用方便。它具有凸轮和滚子结构，滚子作为轴承工作，与小尺寸 BS 系列凸轮离合器相同。外圈具有特殊的形状，与扭矩臂结合在一起，因此只需要停止旋转。

您可以从每 5 毫米 20 毫米至 90 毫米的各种孔径中选择正确的型号。

建议使用电梯或工厂使用的食品输送输送机的后挡板。天牛推荐 BS 系列凸轮离合器用于多尘环境条件下，或用于室外的倾斜输送机和斗式提升机。


Description:

BSEU series Cam Clutch was developed as European style Backstopping Cam Clutch which has easy usage. It has Cam & Roller construction that the roller works as a bearing same as the small size BS series Cam Clutch. The outer race has special shape which was combined the torque arm, so only stopping the rotation is required.

You can select the correct model from various bore size from 20 mm to 90 mm in each 5 mm.


Backstopping for the country elevator or the foods conveying conveyor which is used in the factory is the recommendation. Tianniu recommends BS series Cam Clutch in the very dusty environment condition or the inclined conveyor and the bucket elevator which are used in outside location.

安装参考范例


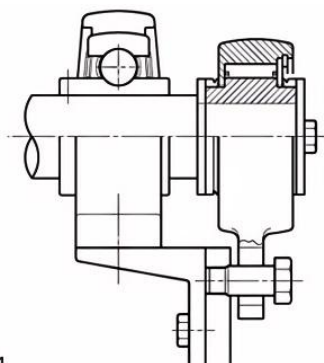


安装实例 1

Mounting example

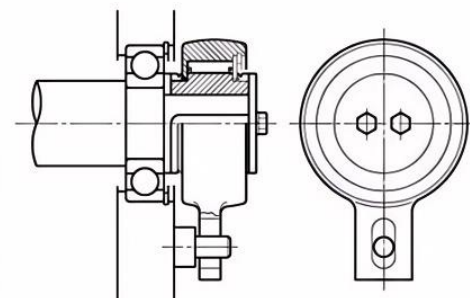

安装实例 2

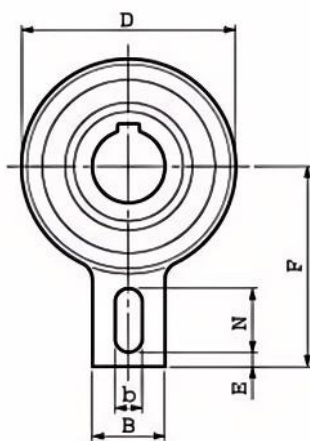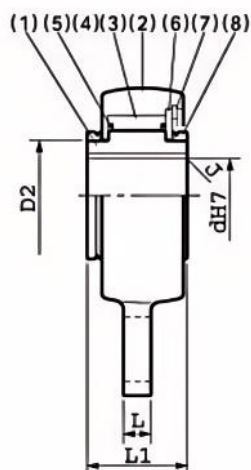

- (1) 内圈
- (2) 外圈
- (3) 凸轮
- (4) 滚筒
- (5) 弹簧
- (6) 板
- (7) 止动环
- (8) V型圈

型号 Type	孔径 Bore Size		扭矩 容量 Torque Capacity (N.m)	内圈最大 空转速度 Max Overrunning (r/min) Inner Race	D	D2	L1	L	B	F	b	N	E	J
	Dia (H7)	键槽 Keyway												
BSEU25-20	20	6×2.8	216	500	83	42	35	12	40	90	15	35	5	1.0
BSEU25-25	25	8×3.3	216	500	83	42	35	12	40	90	15	35	5	1.0
BSEU40-20	20	6×2.8	1440	450	118	60	55	15	40	110	15	35	8	1.5
BSEU40-25	25	8×3.3	1440	450	118	60	55	15	40	110	15	35	8	1.5
BSEU40-30	30	8×3.3	1440	450	118	60	55	15	40	110	15	35	8	1.5
BSEU40-35	35	10×3.3	1440	450	118	60	55	15	40	110	15	35	8	1.5
BSEU40-40	40	12×3.3	1440	450	118	60	55	15	40	110	15	35	8	1.5
BSEU70-45	45	14×3.8	3140	350	165	90	59	20	80	140	18	35	10	1.5
BSEU70-50	50	14×3.8	3140	350	165	90	59	20	80	140	18	35	10	1.5
BSEU70-55	55	16×4.3	3140	350	165	90	59	20	80	140	18	35	10	2.0
B5EU70-60	60	18×4.4	3140	350	165	90	59	20	80	140	18	35	10	2.0
BSEU70-65	65	18×4.4	3140	350	165	90	59	20	80	140	18	35	10	2.0
BSEU70-70	70	20×4.9	3140	350	165	90	59	20	80	140	18	35	10	2.0
BSEU90-75	75	20×4.9	4700	250	190	120	63	20	80	165	20	40	15	2.0
BSEU90-80	80	22×5.4	4700	250	190	120	63	20	80	165	20	40	15	2.0
BSEU90-85	85	22×5.4	4700	250	190	120	63	20	80	165	20	40	15	2.0
BSEU90-90	90	25×5.4	4700	250	190	120	63	20	80	165	20	40	15	2.0