

型号
Type BWX




特性及应用:

BWX 系列是没有内外圈支撑的楔块型单向离合器。使用时需要有外圈，轴承来承受径向及轴向载荷，安装时还需要提供润滑和密封。

Description:

Type BWX is a sprag type freewheel cage without inner or outer races. It must be installed in a design providing races, bearing support for axial and radial loads, lubrication and sealing.

When viewing in direction X
the outer ring freewheels clockwise

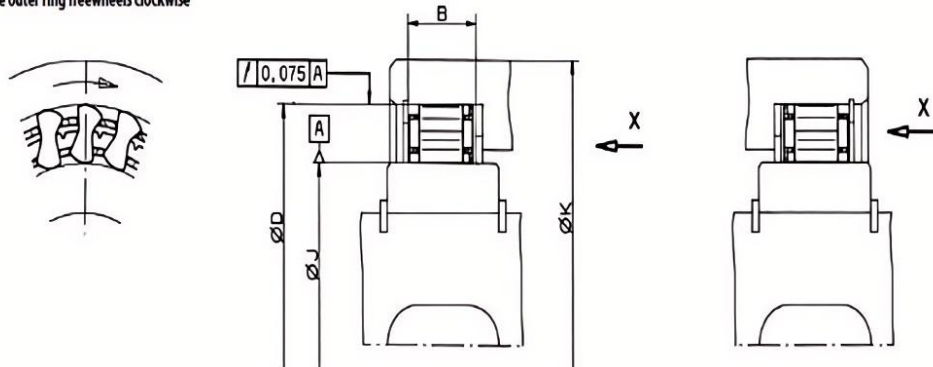

型号 Type	额定扭矩 Nominal torque	J	D	B	K	楔块 数量 Sprags Quantity	Drag strips	Brake clips	Design as ill.	重量 Weight [kg]
	MN [Nm]	+0.008	±0.013	mm	mm		数量 Quantity	数量 Quantity		
		-0.005								
BWX133590A	63	22,225	38,887	10,0	44,0	12			109-2	0,03
BWX13143A	120	27,767	44,425	13,5	51,0	14			109-2	0,06
BWX133392	280	38,092	54,750	16,0	71,0	18			109-3	0,09
BWX1310145	180	41,275	57,937	13,5	74,2	14		3	109-2	0,07
BWX132909A	360	44,450	61,112	16,0	78,5	20	2	3	109-2	0,10
BWX133339	310	49,721	66,383	13,5	85,0	22	2	4	109-2	0,09
BWX1310003	310	49,721	66,383	13,5	85,0	22		4	109-2	0,09
BWX137222	570	49,721	66,383	19,0	85,0	22			109-2	0,12
BWX1310445	400	54,765	71,427	13,5	91,7	24			109-2	0,09
BWX1310172	540	54,765	71,427	16,0	91,7	24			109-2	0,12
BWX1310226	520	54,765	71,427	16,0	91,7	24	2	4	109-2	0,12
BWX136709	770	54,765	71,427	21,0	91,7	24	3	10	109-2	0,16
BWX1310147	1000	54,765	71,427	25,4	91,7	24	3	8	109-2	0,20
BWX136324	600	57,760	74,427	19,0	95,0	26			109-3	0,14
BWX1310080	670	72,217	88,882	13,5	115,0	30		4	109-2	0,12
BWX13168	1300	72,217	88,882	21,0	115,0	30			109-3	0,20
BWX134012	1300	72,217	88.882	21,0	115,0	30	4	10	109-3	0,20
BWX137322	2.000	796,982	96,363	25,4	124,0	34	5	12	109-2	0,28
BWX138316	2960	835,972	102,596	25,4	131,6	34	5	12	109-2	0,30
BWX13261A1	1600	1,032,312	119,893	16,0	154,0	40	6	10	109-3	0,19
BWX13236	1700	1,173,912	136,391	16,0	175,3	30	5	6	109-3	0,25
BWX133403B	4900	1,238,812	142,880	25,4	188,0	44		11	109-2	0,46