


SF

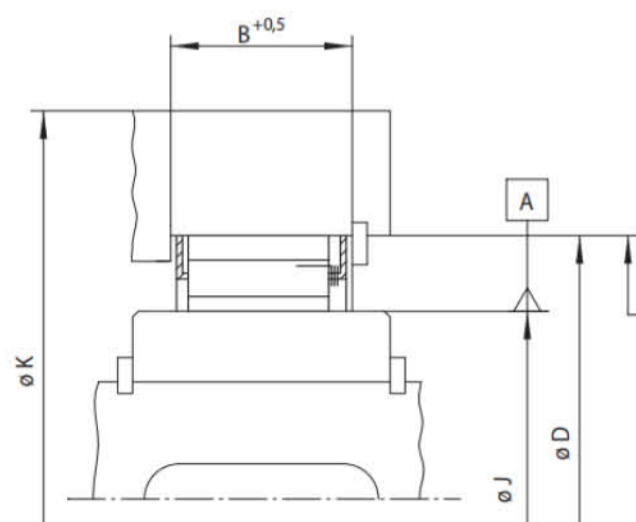

↗ 0,12	A	As of D = 180
↗ 0,06	A	Up to D = 145

Size	Tolerance of track (mm)	
	ø J	ø D
Up to SF 127	-0,01 -0,03	+0,01 -0,01
As of SF 140	-0,02 -0,06	+0,02 -0,02

Freewheel Size	Type	Nominal torque	Type	Nominal torque	Type	Nominal torque	Sprag lift-off at outer ring speed min ⁻¹	J	D	B	K	Sprags Quantity	Weight
		MN		MN		MN		mm	mm	mm	mm		kg
SF18-13,5	J	66						18,80	35,47	13,5	50	10	0,04
SF23-13,5	J	120						23,63	40,29	13,5	55	12	0,04
SF27-13,5	J	160	JT	160	JZ	100	3 600	27,78	44,42	13,5	65	14	0,05
SF31-13,5	J	170	JT	170	JZ	110	3 400	31,75	48,41	13,5	70	12	0,04
SF32-21,5	J	400						32,77	49,44	21,5	65	14	0,07
SF37-14,5	K	270	KT	270	KZ	210	2 900	37	55	14,5	75	14	0,06
SF42-21	J	720						42,10	58,76	21	85	18	0,09
SF44-14,5	K	500	KT	500	KZ	400	2 250	44	62	14,5	90	20	0,08
SF46-21	J	840						46,77	63,43	21	90	20	0,10
SF50-18,5	K	680	KT	680	KZ	580	2 250	50	68	18,5	90	20	0,10
SF56-21	J	1 050						56,12	72,78	21	100	22	0,11
SF57-18,5	K	950	KT	950	KZ	800	2 000	57	75	18,5	105	24	0,13
SF61-21	J	1 300	JT	1 300	JZ	1 150	1 550	61,91	78,57	21	110	26	0,14
SF72-23,5	K	2 100	KT	2 100	KZ	1 850	1 550	72	90	23,5	135	32	0,23
SF82-25	K	2 300	KT	2 300	KZ	2 100	1 450	82	100	25	140	36	0,26
SF107-25	K	3 300	KT	3 300	KZ	3 100	1 300	107	125	25	170	48	0,35
SF127-25	K	4 900	KT	4 900	KZ	4 600	1 200	127	145	25	210	56	0,40
SF140-50	S	13 600	ST	13 600	SZ	10 500	950	140	180	50	260	24	1,70
SF140-63	S	18 000	ST	18 000	SZ	14 000	800	140	180	63	260	24	2,00
SF170-50	S	17 000	ST	17 000	SZ	13 500	880	170	210	50	290	28	1,95
SF170-63	S	23 000	ST	23 000	SZ	18 500	720	170	210	63	290	28	2,40
SF200-50	S	23 000	ST	23 000	SZ	18 500	820	200	240	50	325	36	2,50
SF200-63	S	29 000	ST	29 000	SZ	23 500	680	200	240	63	325	36	3,10
SF230-63	S	37 000	ST	37 000	SZ	29 500	650	230	270	63	360	45	3,90
SF270-50	S	35 000	ST	35 000	SZ	29 500	720	270	310	50	410	48	3,40
SF270-63	S	44 000	ST	44 000	SZ	37 000	600	270	310	63	410	48	4,20
SF340-50	S	45 000	ST	45 000	SZ	43 000	640	340	380	50	510	60	4,20
SF340-63	S	67 500	ST	67 500	SZ	57 500	540	340	380	63	510	60	5,20
SF380-50	S	57 000	ST	57 000	SZ	48 500	610	380	420	50	550	63	4,40
SF440-63	S	93 000	ST	93 000	SZ	80 000	470	440	480	63	640	72	6,20