

型号
Type GN





特性及应用:

GN, DTIIN1 型滚柱式逆止器是一种低速防逆转装置，常与减速机配套，用于带式输送机、提升机、电动滚筒及其他需要逆止的设备。逆止迅速、倒转距离小，寿命长，能承受一定扭矩。

Description:

GN, DTIIN1 backstop clutch is a kind of low speed of roller type plugging device, often with reducer, used in belt conveyor, hoist, electric drum, and other need a non-return device. Non-return quickly, small reverse distance, long life, can withstand the torque.

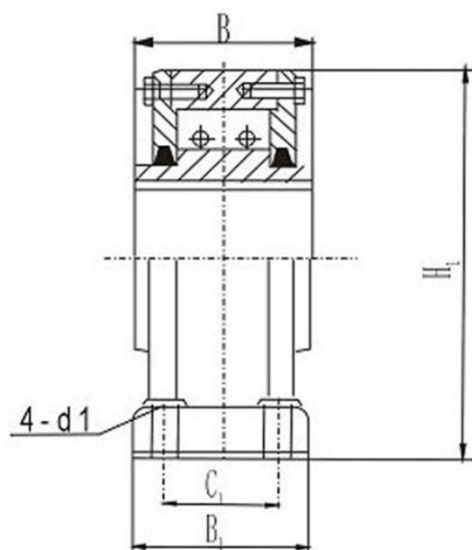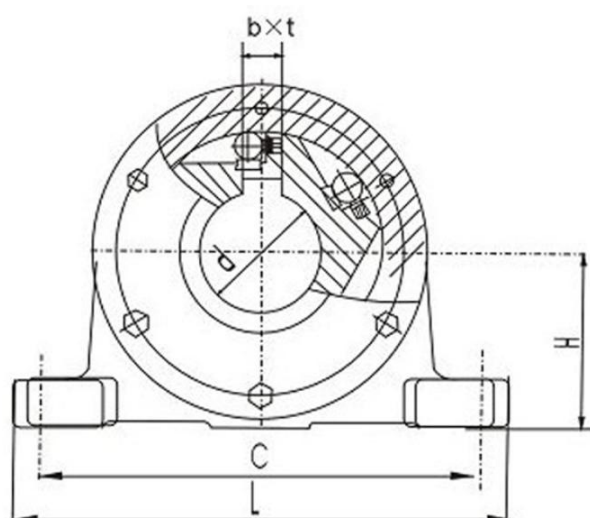

型号 Type	承载 扭矩 T _{KN} N.m	最大孔径 Bore Dia. Max. φdH7 mm	外形尺寸 DIMENSION									重量 Weight	推荐适配减速 机型号 Recommended Suitable Reduce
			b x t mm	C mm	L mm	B mm	C1 mm	B1 mm	H mm	H1 mm	D1 mm	kg	
GN 110	6770	110	32X6.7	400	450	140	90	140	160	310	φ21	89.4	ZQ650 ZQ750
GN 130	13700	130	36X7.4	430	480	170	120	180	175	340		120	ZQ850
GN 140	13700	140	36X7.4	430	480	170	120	190	175	340		105	ZQ85
GN 150	22800	150	40X8.7	510	580	190	170	230	215	420	φ26	186	ZQ1000
GN 170	22800	170	40X8.7	510	580	190	170	250	215	420		182	ZL100
GN 200	47600	200	45X9.9	590	660	220	210	290	275	540	φ32	352	ZL115
GN 220	47600	220	50X11.2	590	660	220	210	290	275	540		339	ZL130